

781RC MicroMark® Recirculating Spray Marking System

marking inks paints



"The MicroMark is a virtually maintenance-free ink marking system that is easy to adjust. It is the standard marking system on every new balancing machine we produce."

Schenck Turner Inc.

The 781RC MicroMark Recirculating Spray Marking System produces uniform round patterns and stripes from 5.0mm to 30.4mm (0.20" to 1.20") wide without clogging or overspray.

This unique marking system eliminates the clogging, maintenance and downtime encountered with standard marking systems by using a recirculating pump to keep pigments in suspension and a programmable air delay after each cycle to clean the spray nozzle.

This MicroMark system can be used to color-code similar components, indicate pass/fail, or show production or test status. It can be activated manually, or interfaced with other systems to mark at scheduled intervals.



Features


- No clogging, dripping or drying out
- Keep pigments in suspension
- No missed shots
- Consistent size and placement
- Cycle rate exceeds 400/minute
- No mist or overspray
- Low-maintenance design

Electronic pdf files of Nordson EFD manuals are also available at www.nordsonefd.com

www.nordsonefd.com info@nordsonefd.com USA 800.556.3484 Europe +44 (0) 1582 666334 Asia +86 (21) 3866 9006
Sales and service of Nordson EFD dispensing systems are available worldwide.

Nordson
EFD

781RC MicroMark Recirculating Spray Marking System

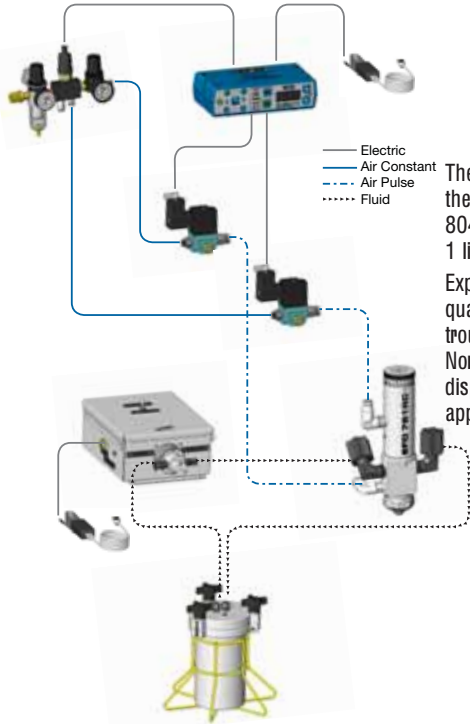

The recirculating pump system includes the 781RC spray valve, ValveMate™ 8040 controller, recirculating pump and 1 liter fluid reservoir.

Expert technical assistance and high quality standards ensure productive, trouble-free performance. Nordson EFD offers a full line of reliable dispensing systems to meet your specific application requirements.

MicroMark Controller

Valve open time is the primary control of deposit size. The MicroMark controller adjusts valve open time and nozzle pressure. It puts push-button adjustment of valve open time where it needs to be — near the valve.

- Multi-valve control- up to (2) spray valves
- Partner to Programmable Logic Controller (PLC)
- Easy deposit size control
- Precise control of nozzle air pressure
- Nozzle air delay for clog-free operation
- Increased production output
- End user convenience
- Maximum machine efficiency

Automation: XYZ & XYZR Robot Dispensing Systems

Nordson EFD offers a wide selection of XYZ and XYZR robot systems that are fully compatible with ValveMate valve controller systems. Consistent, accurate, repeatable and complex dispensing applications can be easily performed with EFD robots, with working envelopes that range from 200 x 200 x 50mm to 510 x 510 x 100mm. Scara robot systems are also available for larger, heavier products or inline dispensing applications.

Fluid Reservoirs

The MicroMark system includes a 1.0 liter tank reservoir and one polyethylene liner.

The tank features full cover removal for easy liner replacement or to place a bottle into this top-ported tank.

MicroMark 781RC Valve

The precision spray valve features a nozzle with 0.7 mm (0.028") orifice and adjustable needle stroke for applying consistent marks 5.0 mm to 30.4 mm (0.20" to 1.20") in diameter.

Adjustable Low Volume Low Pressure (LVLV) nozzle air transfers fluid from the nozzle to the part at low velocity with high transfer efficiency.

Size: 104.6 mm x 26.9 mm diameter (4.12" x 1.06")

Weight: 235.3 grams (8.29 oz)

Actuating air pressure required: 70 to 90 psi (4.8 to 6.2 bar)

Maximum input fluid pressure: 300 psi (20.7 bar)

Fluid inlet thread: 1/8 NPT female

Mounting: (1) 1/4-28 UNF tapped hole or adjustable mounting block

Cycle rate: Exceeds 400 per minute

Air cylinder body: Type 303 stainless steel

Fluid body: Type 303 stainless steel


Air cap: Type 303 stainless steel

Piston: Type 303 stainless steel

Needle and nozzle: Type 303 stainless steel

Needle packings: Teflon®

All stainless steel valve parts are passivated.

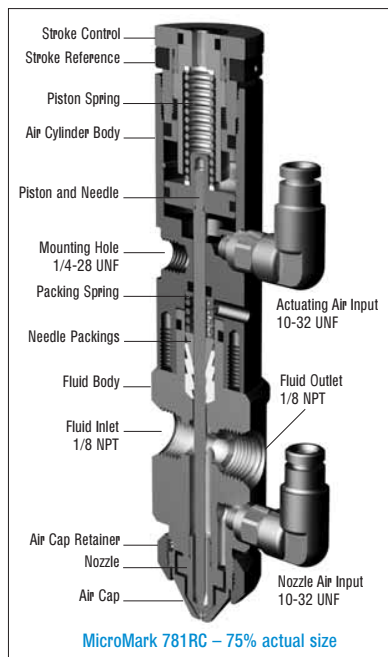

For Nordson EFD sales and service in over 30 countries, contact EFD or go to www.nordsonefd.com

East Providence, RI USA
 USA & Canada: 800.556.3484; +1.401.431.7000
info@nordsonefd.com

Dunstable, Bedfordshire, UK
 0800 585733; +44 (0) 1582 666334

Ireland 00800 8272 9444
europe@nordsonefd.com

China: +86 (21) 3866 9006
china@nordsonefd.com

Singapore: +65 6796 9522
sin-mal@nordsonefd.com

Teflon is a registered trademark of DuPont.
 The Wave Design is a trademark of Nordson Corporation.
 ©2010 Nordson Corporation v042010

Spray Area Coverage

model #	nozzle diameter	pattern	Nozzle distance from surface			
			25.4 mm (1")	50.8 mm (2")	76.2 mm (3")	152.4 mm (6")
781RC-14	0.36 mm (0.014")	round	4.32 mm (0.17")	8.64 mm (0.34")	12.70 mm (0.50")	25.40 mm (1.00")
781RC-28	0.7 mm (0.028")	round	5.0 mm (0.20")	10.1 mm (0.40")	15.2 mm (0.60")	30.4 mm (1.20")

